
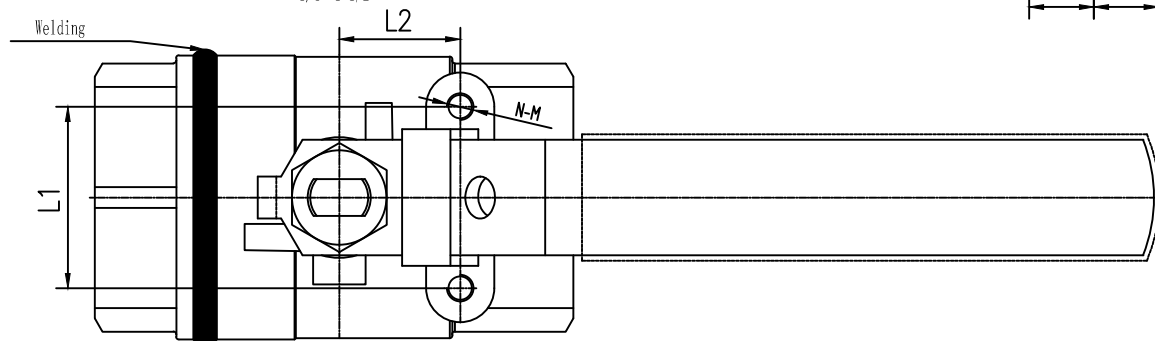
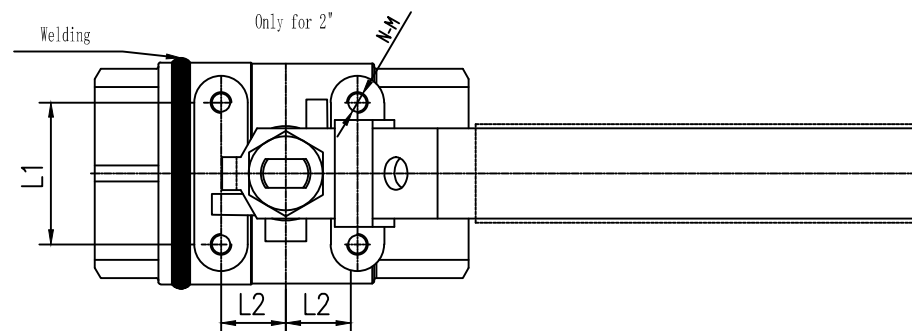


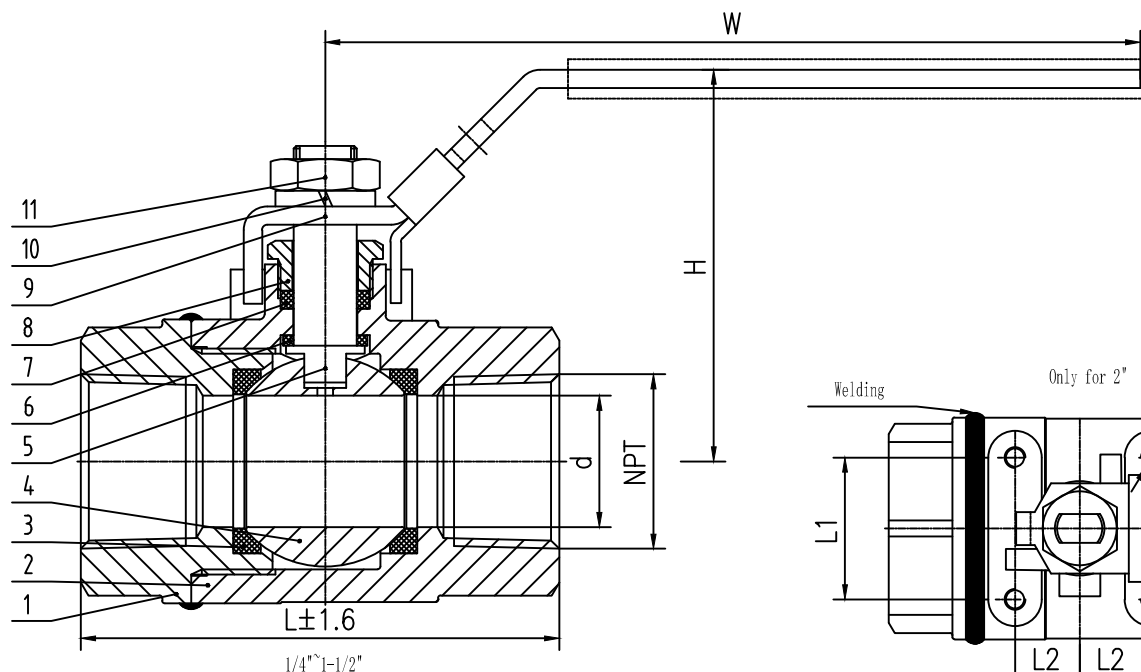

STANDARD DETAILS		Performance Standard		
Design & manufacture	API 608/BS 5351	Test	2000	PSI
Test & Inspect	API 598	Test Pre-ssure	Shell Test	20.7
Face to Face	Manufacturer		Back Seal Test	15.2
Thread	ASME B1.20.1		Seal Test	
Pressure and Temp.Rank	ASME B16.34		Air Test	0.4-0.7
		SuitableTemp.	- 29~80℃	
		Suitablemedium	W.O.G	

2"	48	140	40	24.8	4/0.25-20UNC	110	185	2"-11.5NPT
1-1/2"	38	120	40	26.5	2/0.25-20UNC	95	185	1-1/2"-11.5NPT
1-1/4"	32	110	40	23.0	2/0.25-20UNC	80	155	1-1/4"-11.5NPT
1"	25	91	36	23.0	2/12-24UNC	75	155	1"-11.5NPT
3/4"	19	81	36	22.5	2/12-24UNC	60	155	3/4"-14NPT
1/2"	15	75	30	14.0	2/12-24UNC	60	120	1/2"-14NPT
3/8"	10.5	60	30	13.2	2/12-24UNC	55	100	3/8"-18NPT
1/4"	10.5	60	30	13.2	2/12-24UNC	55	100	1/4"-18NPT
NPS	d	L	L1	L2	N/M	H	W	NPT

11	Nut	A2-70
10	Spring Gasket	A29 1566
9	Handle	SS+PVC
8	Gland	SS
7	Packing	RPTFE
6	Stem Gasket	RPTFE
5	Stem	A276 316
4	Ball	A182 F316
3	Seat	RPTFE
2	Body	A351 CF8M/A216 WCB
1	Bonnet	A351 CF8M/A216 WCB
NO	Part Name	Material

INCOVAL				
Design		Standard		2PC Seal Weld Ball Valve AOP Type 2000WOG
Check		Approve		
Proof				Q11F-2000PSI
Process		Date		